




Specificaties	
Lichtrendement	60-100 lm/W
Driver	OEM
LED	Epistar
Behuizing	Aluminium
IP waarde	IP 20
Energielabel	A++






	C	Opening size
Ø120	96 mm	100 mm
Ø180	160 mm	165 mm
Ø240	220 mm	225 mm
Ø300	280 mm	285 mm

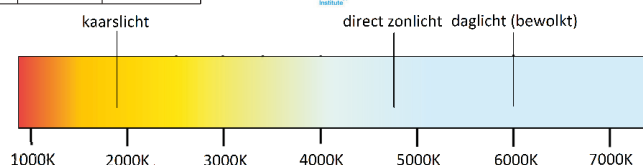

## Economy LED paneel rond inbouw

Omschrijving	Wattage	Lumen	Afmeting	Lichtkleur	Kelvin	Artikelnummer
LED paneel ø12	5 W	500	12 cm	Warmwit	3000K	45000
LED paneel ø12	5 W	500	12 cm	Neutraalwit	4000K	45001
LED paneel ø12	5 W	500	12 cm	Daglicht	6000K	45002
LED paneel ø18	10 W	900	18 cm	Warmwit	3000K	45005
LED paneel ø18	10 W	900	18 cm	Neutraalwit	4000K	45006
LED paneel ø18	10 W	900	18 cm	Daglicht	6000K	45007
LED paneel ø22	15 W	1300	22 cm	Warmwit	3000K	45010
LED paneel ø22	15 W	1300	22 cm	Neutraalwit	4000K	45011
LED paneel ø22	15 W	1300	22 cm	Daglicht	6000K	45012
LED paneel ø30	20 W	1900	30 cm	Warmwit	3000K	45015
LED paneel ø30	20 W	1900	30 cm	Neutraalwit	4000K	45016
LED paneel ø30	20 W	1900	30 cm	Daglicht	6000K	45017



Wij ontvangen graag uw bestelling:  
[www.maclean.pro](http://www.maclean.pro) | [info@maclean.pro](mailto:info@maclean.pro) | 076 - 565 65 65