
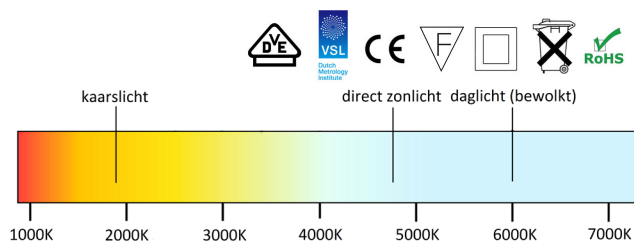



Specificaties	
Lichtrendement	110-115 lm/W
Driver	Boke
LED	San'an SMD2835
Behuizing	Aluminium
	Standaard voorzien van doorvoerbedrading
Schakelingen	50.000
IP waarde	IP 66
Energielabel	A++

	60 cm	120 cm	150 cm
A	600 mm	1200 mm	1500 mm
B	94 mm	94 mm	94 mm
C	69 mm	69 mm	69 mm

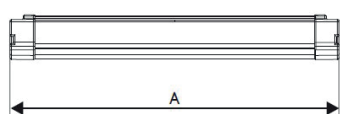

LED Tri Proof (Alu)

Omschrijving	Wattage	Lumen	Afmeting	Lichtkleur	Kelvin	Artikelnummer
LED Tri Proof lamp (Alu)	20 W	2200	60 cm	Warmwit	3000K	50901
LED Tri Proof lamp (Alu)	20 W	2200	60 cm	Neutraalwit	4000K	50902
LED Tri Proof lamp (Alu)	20 W	2200	60 cm	Daglicht	6000K	50903
LED Tri Proof lamp (Alu)	40 W	4400	120 cm	Warmwit	3000K	50904
LED Tri Proof lamp (Alu)	40 W	4400	120 cm	Neutraalwit	4000K	50905
LED Tri Proof lamp (Alu)	40 W	4400	120 cm	Daglicht	6000K	50906
LED Tri Proof lamp (Alu)	50 W	5500	150 cm	Warmwit	3000K	50907
LED Tri Proof lamp (Alu)	50 W	5500	150 cm	Neutraalwit	4000K	50908
LED Tri Proof lamp (Alu)	50 W	5500	150 cm	Daglicht	6000K	50909
LED Tri Proof lamp (Alu)	60 W	6600	150 cm	Warmwit	3000K	50910
LED Tri Proof lamp (Alu)	60 W	6600	150 cm	Neutraalwit	4000K	50911
LED Tri Proof lamp (Alu)	60 W	6600	150 cm	Daglicht	6000K	50912

Stralingshoek: 120°
Hanghoogte: tot 8 meter
Power factor: 0,95>
CRI: 80-85
Temperatuur: -25/+55
Levensduur: L80B10 50.000 uur
Garantie: 5 jaar