
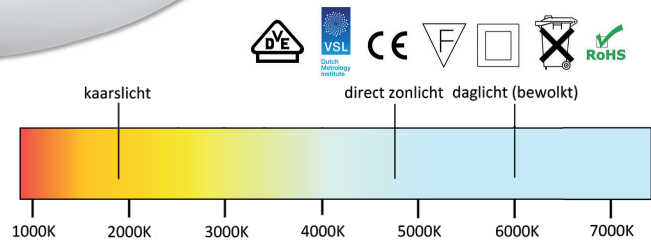


Fiandre

Specificaties	
Lichtrendement	90 lm/W
Driver	TüV
LED	LG 2835 SMD
Schakelingen	50.000
Behuizing	Polycarbonaat
IP waarde	IP 54
Energie label	A++

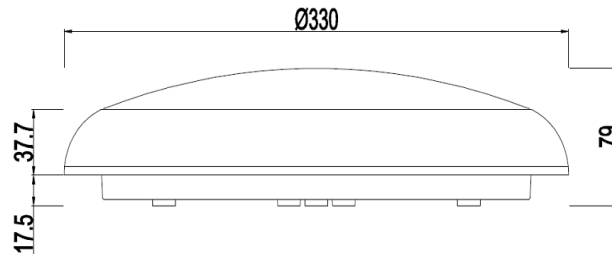

Fiandre

Omschrijving	Info	Wattage	Lumen	Lichtkleur	Kelvin	Artikelnummer
Fiandre	Non-dimm	18 W	1600	Warmwit	3000K	78040
Fiandre	Non-dimm	18 W	1600	Neutraalwit	4000K	78041
Fiandre	Triac dimm	18 W	1600	Warmwit	3000K	78042
Fiandre	Triac dimm	18 W	1600	Neutraalwit	4000K	78043
Fiandre	Multi Micro Wave Sensor	18 W	1600	Warmwit	3000K	78044
Fiandre	Multi Micro Wave Sensor	18 W	1600	Neutraalwit	4000K	78045
Fiandre	Emergency Battery	18 W	1600	Warmwit	3000K	78046
Fiandre	Emergency Battery	18 W	1600	Neutraalwit	4000K	78047
Fiandre	Multi Micro Wave Sensor + Emergency Battery	18 W	1600	Warmwit	3000K	78048
Fiandre	Multi Micro Wave Sensor + Emergency Battery	18 W	1600	Neutraalwit	4000K	78049

Stralingshoek: 120°
Hanghoogte: tot 4 meter
Power factor: 0,90 >
CRI: 80 >
Temperatuur: -20/+40
Levensduur: L70B10 50.000 uur
Garantie: 3 jaar

MACLEAN®

Wij ontvangen graag uw bestelling:
www.maclean.pro | info@maclean.pro | 076 - 565 65 65