


LED RGB Line 2

Self-adhesive LED RGB flexible strips for 24 V



- Connection:** LED-transformer DC 24 V
- Lamp:** extremely long-life RGB-LED, \varnothing life 30,000 hours
- Energy efficiency:** Luminaire white: appr. **210 lm/m** (32 lm/W); this luminaire contains built-in, not changeable LED lamps of the energy efficiency class A to A++
- Special features:**
- quick and easy installation with double-sided adhesive tape and integrated plug and socket of the Line (direct plug-in without connecting cable)
 - stripe can be shorten all 167 mm (marking under the adhesive foil)
 - with Memory-Function (after cut off from mains the last switching status is recovered)
 - dimmable in four steps
 - colours free adjustable with colour board
 - 7 colours alternately 8, 16, 32, 64 and 128 Sek. adjustable
 - gently fading colour flow 8, 16, 32, 64 and 128 Sek. adjustable
 - automatic lock-out of the colour board after 1 Min. on the radio telecontrol
 - **Radio Controller as extension to train**

max. 5 m per supply cable

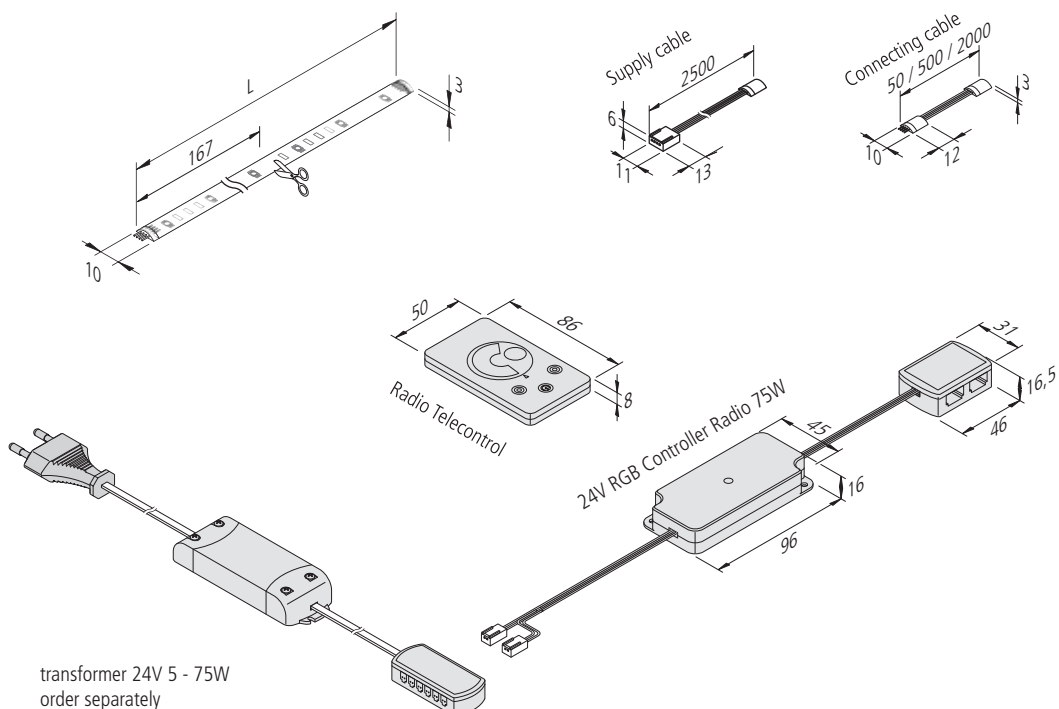

LED RGB Line 2

New

Self-adhesive LED RGB flexible strips for 24 V



Introduction

LED Linear Luminaires

Linear Luminaires

Recessed and Surface-Mounted Luminaires

Showcase and Over-Cabinet Luminaires

Under-Cabinet Luminaires

Accessories

Appendix

Article No.	Description	Illustration	Features	Weight
202 025 201 01	LED RGB Line 2 333mm 12 LED 2,2W		<ul style="list-style-type: none"> • Light colour RGB 	11 g
202 025 202 01	LED RGB Line 2 1000mm 36 LED 6,6W			33 g
202 025 203 01	LED RGB Line 2 2000mm 72 LED 13,2W			66 g
215 290 625 01	Supply cable LED RGB Line 2500mm		<ul style="list-style-type: none"> • connection between controller and first LED RGB Line 	40 g
215 290 600 01	Connecting cable LED RGB Line 50 mm		<ul style="list-style-type: none"> • connection between two LED RGB Lines 	2 g
215 290 605 01	Connecting cable LED RGB Line 500 mm			9 g
215 290 620 01	Connecting cable LED RGB Line 2000 mm			40 g
615 000 505 41	24V RGB Controller Radio 75W with 4-way distributor		<ul style="list-style-type: none"> • with radio telecontrol (reach max. 15m) 	105 g
208 050 030 22	24V RGB Controller Radio 75W with 4-way distributor			<ul style="list-style-type: none"> • without radio telecontrol (only as extension to transformers with radio telecontrol)
215 080 607 05	LED RGB 4-way distributor		<ul style="list-style-type: none"> • cable 100 mm with plug • for 3 additional mains cables on the transformer 	16 g
Accessories:	LED Transformers 24V from page 132 Profiles page 32			